

CFD simulation of nanofiber-enhanced air filter media

*Original*

CFD simulation of nanofiber-enhanced air filter media / Tronville, PAOLO MARIA; Augusto, L. L. X.; Bortolassi, A. C. C.; Lopes, G. C.; Gonçalves J. A., S; Rivers, R. D.. - ELETTRONICO. - USB-Stick:(2015), pp. 1-13. (Intervento presentato al convegno FILTECH 2015 tenutosi a Cologne nel 24-26 February 2015).

*Availability:*

This version is available at: 11583/2607558 since:

*Publisher:*

Filtech Exhibitions Germany

*Published*

DOI:

*Terms of use:*

openAccess

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

default\_conf\_editorial [DA NON USARE]

-

(Article begins on next page)

# Plenary Lecture

## How Could Integrated Science change the Separation Technology in the Future?

**Dr. Karsten Keller**  
DuPont  
USA

**PL** Tuesday, February 24, 2015  
10:45-12:00 h

"The global population is project to grow from 7 billion today to 9 billion by 2050. The increase in population and the accompanying shifting global economic patterns will result in a significant increase in demand for food, energy and protection. Separation technology plays a key role in ensuring new solutions are environmentally sustainable. Indeed, existing separation technology has enabled us today to have clean air and water. Nearly every production process in today's society requires a separation step. As a result, global market in separation technology is growing and is over USD 100 billion annually. Exactly how should separation research develop in the next decade and beyond? Nowadays technical solutions are available for almost every separation task. However for the future the pressing challenge is to find economical solutions. If the ideal separation technology/process would have been invented, our world would face fewer difficulties for food, water, energy and environment..."

# Keynote Lectures

## Sugar Purification from Enzymatic Hydrolysis Products using Membrane Diafiltration

**Prof. Kuo-Jen Hwang**  
Tamkang University, Dept. of Chemical and Materials Engineering, Taiwan

**K1** Tuesday, February 24, 2015  
13:00-14:15 h

## Selective recovery of valuable plant and biomass compounds through biological membranes exposed to pulsed electric field: A new way for "green" filtration and purification technologies

**Prof. Eugène Vorobiev**  
Université de Technologie de Compiègne, France

**K2** Tuesday, February 24, 2015  
14:45-16:00 h

## Precoat Filtration. Insights into a well-established technology that still offers plenty of opportunities

**Dr. Eberhard Gerdes**  
JRS Rettenmaier & Söhne  
Germany

**K3** Tuesday, February 24, 2015  
16:45-18:00 h

## Measuring Filter Cut Points and Pore Size Distributions by Challenge Testing

**Dr. Graham Rideal**  
Whitehouse Scientific  
UK

**K4** Wednesday, February 25, 2015  
09:00-10:15 h

## Filtration – A Multi-Scale and Multi-Physics Challenge for Simulation

**Dr. Martin Lehmann**  
Mann+Hummel  
Germany

**K5** Wednesday, February 25, 2015  
10:45-12:00 h

## On local Cake Properties in Liquid Filtration

**Prof. Hans Theliander**  
Chalmers University of Technology, Forest Products and Chemical Engineering, Sweden

**K6** Wednesday, February 25, 2015  
13:00-14:15 h



# Session Overview

## Monday, 23.02.2015

09:00 – 18:00	Short Course I – Solid/Liquid Separation	Short Course II – Fine Dust Separation
---------------	--	--

## Tuesday, 24.02.2015

08:30 – 10:15	Registration				
10:15 – 10:45	Opening Session				
10:45 – 12:00	<b>PL</b> Plenary Lecture – Dr. Karsten Keller, DuPont, USA How could Integrated Science change the Separation Technology in the Future?				
12:00 – 13:00	Lunch – Fair				
13:00 – 14:15	<b>K1</b> Keynote Lecture 1 Prof. Kuo-Jen Hwang	<b>L1</b> Dispersion Separation Analysis	<b>L2</b> Cake Filtration- Analysis	<b>G1</b> Surface Filtration I	<b>G2</b> Gaseous, Liquid, Solid Contaminants
14:15 – 14:45	Coffee Break – Fair				
14:45 – 16:00	<b>K2</b> Keynote Lecture 2 Prof. Eugene Vorobiev	<b>L3</b> Decanter Centrifuges and Hydrocyclones	<b>L4</b> Cake Filtration- Washing	<b>G3</b> Surface Filtration II	<b>G4</b> Automotive Application
16:00 – 16:45	Coffee Break – Fair				
16:45 – 18:00	<b>K3</b> Keynote Lecture 3 Dr. Eberhard Gerdes	<b>L5</b> Filtration Analysis, Apparatus, Selection & Design	<b>L6</b> Continuous Vacuum and Pressure Cake Filters	<b>G5</b> Surface Filtration III	<b>M1</b> New Membranes
18:00	Get Together Reception				

## Wednesday, 25.02.2015

09:00 – 10:15	<b>K4</b> Keynote Lecture 4 Dr. Graham Rideal	<b>L7</b> Backwash Filters	<b>G6</b> Modelling and Simulation	<b>M2</b> Micro- and Ultrafiltration	
10:15 – 10:45	Coffee Break – Fair				
10:45 – 12:00	<b>K5</b> Keynote Lecture 5 Dr. Martin Lehmann	<b>L8</b> Vibration, Magnetic & Electric Enhanced Filtration	<b>G7</b> Test Systems and Measurements	<b>M3</b> Fouling and Scaling	
12:00 – 13:00	Lunch – Fair				
13:00 – 14:15	<b>K6</b> Keynote Lecture 6 Prof. Hans Theliander	<b>L9</b> Flocculation for Separation Enhancement	<b>G8</b> Mist and Droplet Separation	<b>M4</b> Cross Flow Techniques	
14:15 – 14:45	Coffee Break – Fair				
14:45 – 16:00	<b>L10</b> Poster Session	<b>L11</b> Filter Aids and Precoat Filtration	<b>G9</b> Poster Session I	<b>G10</b> Poster Session II	<b>M5/F5</b> Poster Session
16:00 – 17:15	Poster Viewing	<b>L12</b> Cake Filtration of Slurries with poor Filterability	Poster Viewing	Poster Viewing	Poster Viewing
	Coffee Break – Fair				

## Thursday, 26.02.2015

09:00 – 10:15	<b>F1</b> Surface Modification of Filter Media	<b>L13</b> Filter Media	<b>G11</b> Air Filters – HEPA	<b>M6</b> Separation of Bio-Products
10:15 – 10:45	Coffee Break – Fair			
10:45 – 12:00	<b>F2</b> Production Technology of Filter Media	<b>L14</b> Sorting and Classification	<b>G12</b> Air Filters – HVAC	<b>M7</b> Mechanisms, Models, Simulation
12:00 – 13:00	Lunch – Fair			
13:00– 14:15	<b>F3</b> Fine Fiber and Membrane Manufacturing	<b>L15</b> Depth Filtration	<b>G13</b> Industrial Gas Cleaning I	<b>M8</b> Process and Waste Water Treatment
14:15– 14:45	Coffee Break – Fair			
14:45– 16:00	<b>F4</b> Numeric Simulation of Porous Structures	<b>L16</b> Coalescer/Liquid – Liquid Separation	<b>G14</b> Industrial Gas Cleaning II	<b>M9</b> Ceramic Membrane Applications
	Coffee Break – Fair			

**Tuesday, February 24, 2015**
**Plenary Lecture**

10:45 - 12:00 h

**PL**
**How could Integrated science change the separation technology in the future?**

 Dr. Karsten Keller  
DuPont, USA

**Keynote Lecture 1**

13:00 - 14:15 h

**K1**
**Sugar purification from enzymatic hydrolysis products using membrane diafiltration**

Prof. Kuo-Jen Hwang, Tamkang University, Taiwan

**Dispersion Separation Analysis**

13:00 - 14:15 h

**L1**

**Introducing LUMiReader® X-Ray - A new instrument for the evaluation of separation behaviour of concentrated nontransparent dispersions** D. Lerche\*, D. Kavianpour, A. Zierau, T. Sobisch, LUM GmbH, Germany

**Characterization of the separation and segregation behaviour of model paper dispersions**, D. Kavianpour\*, T. Sobisch, A. Zierau, D. Lerche, LUM GmbH, Germany

**Use of photocentrifuge for membrane separation and characterization of solutions filterability**, M. Loginov\*, N. Lebovka, E. Vorobiev, University of Technology of Compiègne, France

**Cake Filtration Analysis**

13:00 - 14:15 h

**L2**

**Wall effect of solid liquid filter test on filter up-scaling**, R. Giner, G. Grammer\*, Andritz AG, Austria

**Systematical laboratory tests with a bucket centrifuge and a pressure nutsche – Comparison of the cake permeability and consequences for the scale-up of batch filtering centrifuges**, R. Ebert, E. Verdurand\*, M. Schmid, DSM-Nutritional Products, Switzerland; I. Nicolaou, NIKIFOS Ltd., Cyprus

**Efficient internal filtration system for solid-liquid separation**, M. A. Khodaghali\*, A. K. Forsat, Research Institute of Petroleum Industry; M. R. Hemmati Mahmodi, Sorosh Energy Pouya, Iran

**Surface Filtration I**

13:00 - 14:15 h

**G1**

**Influence of leaks on the overall emission behaviour of bag house filters**, O. Kurtz\*, J. Meyer, G. Kasper, Karlsruhe Institute of Technology, Germany

**Airborne nanoparticle filtration by filter cakes on pulse-jet cleaned filter media**, H. Förster\*, C. Funk, W. Peukert, University Erlangen-Nuremberg, Germany

**Study and characterization of the emitted particles in pulse jet filtration**, A. K. Choudhary\*, A. Mukhopadhyay, Jalandhar Institute of Technology, India

**Gaseous, Liquid, Solid Contaminants**

13:00 - 14:15 h

**G2**

**Gas phase adsorption of dimethyl sulfide on activated carbon cloth (GDSEL651)**, N. Hoda\*, A. Topuz, F. Mert, L. Budama, E. Eroglu, Akdeniz University, Turkey

**Filtration performance in air-oil separation**, I. Parker\*, Ahlstrom Filtration LLC, USA; H. Lin, G. Costa, Ahlstrom Italy s.p.a., Italy

**New media generation for cabin air filter application**, A. Scope, D. Keerl\*, MANN+HUMMEL Innenraumfilter GmbH & Co. KG, Germany

**Keynote Lecture 2**

14:45 - 16:00 h

**K2**

**Selective recovery of valuable plant and biomass compounds through biological membranes exposed to pulsed electric field: A new way for "green" filtration and purification technologies** Prof. Eugène Vorobiev, University of Compiègne, France

**Decanter Centrifuges and Hydrocyclones**

14:45 - 16:00 h

**L3**

**Design of decanter centrifuges – development of laboratory test methods and calculations for separation efficiency prediction**, M. Bohlmann, Siebtechnik GmbH, Germany

**Hydrocyclone - Design & optimization - A new user friendly and reliable approach**, I. Nicolaou\*, NIKIFOS Ltd, Cyprus

**Experimental and simulation of a novel hydrocyclone - Tubular membrane as overflow pipe**, C. C. Wang, R.-M. Wu\*, Tamkang University, Taiwan

**Cake Filtration Washing**

14:45 - 16:00 h

**L4**

**The influence of wetting on washing and filtration properties**, M. Burisch\*, U.A. Peuker, Technical University Bergakademie Freiberg, Germany

**Chemical effects in filtration and washing of blast furnace slag**, R. Salmimies\*, A. Häkkinen, Lappeenranta University of Technology, Finland; M. Burisch, U.A. Peuker, Technical University Bergakademie Freiberg, Germany

**Cleaning of filter media contaminated with yeast by pulsed jets**, B. Bollwein\*, D. Ulmen, J. Tippmann, T. Becker, Technical University Munich, Germany

**Surface Filtration II**

14:45 - 16:00 h

**G3**

**Filter movement during pressure pulse regeneration – A comparison of flat media and fiber bags with regard to cleaning intensity and acceleration**, S. Sobich\*, J. Meyer, G. Kasper, Karlsruhe Institute of technology, Germany

**Effect of fabric type and dust concentration on filtration performance**, A. Mukhopadhyay\*, S. R. Swain, Jalandhar Institute of Technology, India

**Test method for small scale pulse-cleaned package type dust collection system**, A. Morishita\*, H. Kudou, K. Kitabayashi, S. Katsushima, AMANO Corporation, C. Kanaoka, Kanazawa University, Japan

**Automotive Application**

14:45 - 16:00 h

**G4**

**Impact of viscous oil impregnation on the performance of motorcycle engine intake air filters**, A. K. Maddineni\*, S. Chakote, Varroc Polymers Pvt. Ltd., India; H. Sauter, Germany

**Micro scale simulation as part of fibrous filter media development processes - From real to virtual media**, J. Weber\*, A. Kilian, M. Heim, M. J. Lehmann, MANN+HUMMEL GmbH, Germany

**Building a refrigerant recovery recycling machine for HFC-134a: From architecture definition to prototype implementation**, B. N. Floresca\*, Technological University of the Philippines, Philippines


**Keynote Lecture 3**

16:45 - 18:00 h

**K3**

**Precoat filtration. Insights into a well-established technology that still offers plenty of opportunities** Dr. Eberhard Gerdes, JRS Rettenmaier & Söhne, Germany

**Filtration Analysis, Apparatus Selection and Design**

16:45 - 18:00 h

**L5**

**Cake forming filtration - From the theory based laboratory tests to the reliable selection and optimal design of filter apparatuses**, I. Nicolaou\*, NIKIFOS Ltd, Cyprus

**The filtration calculator: A novel tool for the "daily needs" of people dealing with cake forming filtration**, N. Wagner\*, F. Tomasko, FLSmidth Wiesbaden GmbH, Germany

**Assessment of turbidity meter / Sensor filter combination in beer filtration**, H. H. Kleizen, J.B.J. Kleizen, Dutchap BV; G. J. Beune APT BV, Netherlands

**Continuous Vacuum and Pressure Cake Filters**

16:45 - 18:00 h

**L6**

**Bypass dust processing in the cement manufacturing process - BHS belt filter allow primary fuel substitution rates of up to 100 percent**, C. Steinbinder, T. Ochel\*, BHS-Sonthofen GmbH, Germany

**Combined continuous pressure and press filtration with a HiBar drum filter**, E. Ehrfeld\*, R. Bott, T. Langeloh, BOKELA GmbH, Germany

**Filtration of hot slurries with HiBar filtration**, R. Bott\*, T. Langeloh, E. Ehrfeld, BOKELA GmbH, Germany





## Surface Filtration III

16:45 - 18:00 h

G5

**Evaluation of the efficiency of filtration processes using precoat materials**, S. Schiller\*, H.-J. Schmid, University of Paderborn; C. Hellmich, Hellmich GmbH & Co. KG, Germany

**Investigating reasons for filter bag failure and developing a method to improve its life span**, A. Patnaik\*, R. D. Anandjiwala, CSIR Materials Science and Manufacturing and Nelson Mandela Metropolitan University, South Africa

**Experimental investigations into the effects of ambient humidity on particle-loaded single filter fibers**, Q. Zhang\*, University of Wuppertal, Germany

## New Membranes

16:45 - 18:00 h

M1

**Characterization of microporous hydrophobic membranes used in membrane distillation process**, M. Rezaei\*, W. M. Samhaber, University Linz, Austria

**Porous water repellent silica aerogel membranes for membrane distillation applications**, K.-L. Tung, C.-C. Wang, National Taiwan University; Y.-F. Lin, Chung Yuan Christian University, M. S. Huang, Industrial Technology Research Institute, Taiwan

**Revolutionary impact of nanotechnology on advanced membranes: Forward osmosis and solvent stable membranes**, M. Peyravi, M. Jahanshahi\*, Babol University of Technology, Iran

## Wednesday, February 25, 2015

### Keynote Lecture 4

09:00 - 10:15 h

K4

**Measuring filter cut points and pore size distributions by challenge testing**  
Dr. Graham Rideal, Whitehouse Scientific, UK

### Backwash Filters

09:00 - 10:15 h

L7

**Development of a high gradient magnetic separator for the application in oil filtration**, E. Förster\*, K. Menzel, H. Nirschl, Karlsruhe Institute of Technology, Germany

**Automatic backwash filter for bath purification**, W. Watzinger\*, Lenzing Technik GmbH, Austria

**Iron and manganese treatment of groundwater by means of pre-treatment and an automatic backwash filter**, M. Hochedlinger\*, P. Stimpfl, E. Hawle Armaturenwerke GmbH, J. Kölbl, Blue Networks e.U., Austria; P. Galambos, L. Kuzma, Hawle Szerelvénygyártó és Forgalmazó Kft., Hungary; P. Sommerauer, H. Haring, HAWLE Armaturen GmbH, Germany

### Modelling and Simulation

09:00 - 10:15 h

G6

**CFD simulation of nanofiber-enhanced air filter media**, P. Tronville, Politecnico di Torino, Italy; L.L.X. Augusto, A.C.C. Bortolassi, G.C. Lopes, J.A.S. Gonçalves, Federal University of São Carlos, Brazil; R. Rivers, EQS Inc., USA

**Simulation of nanoscale particle movement and deposition**, A. Stief\*, C. Feuchter, Aalen University, Germany; K. Langfeld, University of Plymouth, UK

**Numerical simulation of exhaust gas flow and reaction kinetics in the micro porous soot structure of deposited particles in DPFs**, M. Bürger\*, U. Janoske, University of Wuppertal, Germany

### Micro- and Ultrafiltration

09:00 - 10:15 h

M2

**Sintered metal fibre microfiltration of bio-ethanol fermentation broth**, Q. Kang\*, R. Dewil, Catholic University Leuven, Belgium; J. Baeyens\*, T.W. Tan, Beijing University of Chemical Technology, China

**Cleaning usability and flux recovery of ultrasound during and after ultrafiltration processing**, A. M. Maskooki\*, M. H. Shahraki, M. Mohammadi, RIFST Research Institute of Food Science and Technology, Iran

**Functional polymers coupled to ultrafiltration membranes to remove and separate anions from aqueous solution**, B. L. Rivas\*, J. Sánchez, L. Toledo, University of Concepción, Chile

### Keynote Lecture 5

10:45 - 12:00 h

K5

**Filtration – A multi-scale and multi-physics challenge for Simulation**

Dr. Martin Lehmann, Mann+Hummel, Germany

### Vibration, Magnetic and Electric Enhanced Filtration

10:45 - 12:00 h

L8

**Vibration-enhanced compaction of filter cakes and its influence on shrinkage cracking**, S. Illies\*, H. Anlauf, H. Nirschl, Karlsruhe Institute of Technology, Germany

**Numerical dual-porosity model of solid-liquid expression from electroporated bio-solids**, Mahnič-Kalamiza\*, E. Vorobiev, University of Technology of Compiègne, France

**Optimisation of mineral sludge combined dewatering: Aggregation and constant-current electrofiltration in a filter-press**, M. Loginov\*, M. Citeau, N. Lebovka, E. Vorobiev, University of Technology of Compiègne, France

### Test Systems and Measurements

10:45 - 12:00 h

G7

**Filter media testing in overpressure up to 4 bar – Isobaric detection of fractional efficiency**, M. Schmidt\*, Palas® GmbH, Germany

**The impact of the aerosol generation on the characterization of complete filter or filter media**, S. Schütz\*, M. Schmidt, Palas® GmbH, Germany

**Method and device for inhalation intake assessment of radioactive gas-aerosol mixtures**, A. Karev\*, A. Tsovanov, Federal Medical Biophysical Center, Russia

## Fouling and Scaling

10:45 - 12:00 h

M3

**Ultrafiltration of alginate solutions with ceramic hollow fiber membranes: An experimental study of fouling mechanisms**, F. Arndt\*, J. Braun, H. Anlauf, H. Nirschl, Karlsruhe Institute of Technology; I. Unger, F. Ehlen, S. Schütz, MANN+HUMMEL GmbH, Germany

**Reduction of hollow fiber membrane fouling through electroadsorptive filtration of back wash water**, R. Komplenik\*, Ahlstrom Filtration LLC; J. Brant, University of Wyoming, USA

**The performance of polycarboxylates as inhibitors for CaCO<sub>3</sub>-scaling in reverse osmosis-plants**, W. Hater, K. Urbahn, A. Icart, ICL Water Solutions; J. Jaworski, N. Kruse, G. Braun\*, Cologne University of Applied Sciences, Germany



### Keynote Lecture 6

13:00 - 14:15 h

K6

**On local cake properties in liquid filtration**  
Prof. Hans Theliander, Chalmers University, Sweden

### Flocculation for Separation Enhancement

13:00 - 14:15 h

L9

**Speeding up process development by an automated flocculation setup**, E. J. Freydel\*, M. W. Wilson, S. Beurskens, A.M.C. Janse G. N.M. Ferreira, E.J.A.X. van de Sandt, DSM Biotechnology Center, Netherlands

**Implementation of floc characteristics to improve deep bed filtration modelling in water treatment**, I. Slavik\*, W. Uhl, Technische Universität Dresden, Germany

**Approach to determine particle density for modelling purposes in water treatment and supply**, I. Slavik\*, A. Korrenz, K. Ripl, W. Uhl, Technische Universität Dresden, Germany

### Mist and Droplet Separation

13:00 - 14:15 h

G8

**Entrainment of droplets from oil mist filters – Characteristics and relevant parameters**, S. Wurster\*, J. Meyer, G. Kasper, Karlsruhe Institute of Technology, Germany

**Enhanced analysis of droplet separation efficiency of knitted wire meshes by optical particle counter measurements and direct numerical simulation based on tomographies**, K. Schmidt\*, F. Haller, A. Hellmann, S. Ripberger, Technical University of Kaiserslautern; W. Heikamp, Rhodius GmbH, Germany

**Isothermal and isobaric measurements of engine crankcase ventilation filters**, S. Schütz, L. Mölter, M. Schmidt, Palas® GmbH, Germany



Cross Flow Techniques

13:00-14:15 h

M4

**Separation of catalysts with dynamic precoat filtration on the DYNO filter**, E. Ehrfeld\*, R. Bott, T. Langeloh, BOKELA GmbH, Germany

**Optimization of yield when processing beverages with the dynamic cross flow filter**, G. Grim\*, Andritz KMPT GmbH

**Effect of disk structure on the performance of rotating-disk microfiltration of microalgae**, K.-Y. Hwang, S.-E. Wu, Tamkang University, Taiwan

Poster Session I

14:45-16:00 h

L10

**Strategies and tools available to solid-liquid separations consultants in industry**, S. Wolff\*, E. I. DuPont de Nemours, USA

**Functionalized filter media for continuous vacuum filtration without vacuum and filtrate pumps**, H. Anlauf\*, Karlsruhe Institute of Technology, Germany

**Cake filtration simulation for poly-dispersed spherical particles**, O. Iliev, R. Kirsch, S. Osterroth\*, Fraunhofer Institute for Industrial Mathematics, Germany

**Analysis of stepwise expression of sake fermentation broth**, R. Fukuyama\*, A. N. Ginting, T. Tanaka, M. Iwata, Osaka Prefecture University, N. Yabuta, YABUTA Industries, Co., Ltd, Japan; M. S. Jami, Islamic University Malaysia, Malaysia

**Groundwater filtration through chalcedonite sand**, J. Je -Walkowiak\*, Poznan University of Technology, Poland

**Application of Iranian zeolite (Semnan area) for removal of environmental pollution of sulfide**, S. Karimi, A. Azadmehr\*, Amirkabir University of Technology, Iran

**Kinetics and thermodynamic adsorption studies of the humic acid adsorption from peat water using Fe<sub>3</sub>O<sub>4</sub> nano particles**, M. A. Zulfikar\*, S. A. Purba, I. Suri, H. Setiyanto, Bandung Institute of Technology, Indonesia

**Increasing the filtration rate of new valley phosphate concentrate with cost-effective organic additives**, E.A. Abdel-Aal\*, Central Metallurgical R&D Institute; E.A. Abdel Rahman, Egypt Phosphate Company; A.T. Kandil, Helwan University, Egypt

**Patent-Overview: Wet filtration techniques using non-woven textile fabrics**, L. Sinowzik\*, Sächsisches Textilforschungsinstitut e.V. (STFI), Germany

**Reduction of greywater pollutants using modified hydraulic structure case study: Multi – layer cascade weir**, D.W. Abbood\*, E. A.Jasim, Mustansiriyah University, Iran

**Prospects of use of the Flomin EM-230 additive in the filtering process of the phosphoric slurry**, A.L. Guimarães, R. F. Pires\*, Federal University of Triângulo Mineiro, Brazil

Filter Aids and Precoat Filtration

14:45-16:00 h

L11

**Improving filter-aid filtration by means of a new mechanistic process model**, M. Kuhn\*, H. Briesen, Technical University Munich, Germany

**Viscose speciality fibres as filter auxiliaries**, P. Wimmer\*, R. Scholz, D. Bauer, T. Kandler, Kelheim Fibres GmbH, Germany

**Method of comparison for hydraulic filter media**, A. Willis\*, Hollingsworth & Vose Co. Ltd., UK

Poster Session I

14:45-16:00 h

G9

**The performance simulation analysis and experimental research on the air filter of engineering vehicle in highland environment**, J.-J. Lu\*, Y. Sun, J.-D. Wang, M.-H. Li, J.-X. Li, M.-H. Qiao, North Vehicle Research Institute, China

**Characterization of dustiness – Influence of low pressure**, T. Londershausen\*, E. Schmidt, University of Wuppertal, S. Sander, U. Fritsching, University of Bremen, Germany

**Liquid bridge force between two unequal-sized spheres – Problems with mechanical models using a circular bridge shape approach**, F. Schröter\*, E. Schmidt, University of Wuppertal, Germany

**Measurement of the adhesion moment of a particle-wall contact and comparison to simulated values**, A. Haarmann\*, E. Schmidt, University of Wuppertal, Germany

**Determination of the adhesion force between particle and filter membrane using a centrifuge technique**, A.F. Almeida, M. L. Aguiar\*, Federal University of São Carlos, Brazil

**Effect of the vibration on deposition of particles during gas filtration using fabric filters**, A. M. M. Arouca, F. O. Arouca\*, L. G. M. Vieira, J.J. R. Damasceno, Federal University of Uberlândia, Brazil

**Simulation of particle-particle & particle-fiber adhesion using star CCM+ from CD-Adapco**, L.L.X. Augusto\*, G.H. Justi, M.L. Aguiar, V.G.G. Bettega, J.A.S. Gonçalves, G. C. Lopes, Federal University of São Carlos, Brazil

**Vertical liquid distribution in filter cartridge during gas-liquid filtration**, Z. Liu\*, Y. Z. Dang, Z. L. Ji, M. J. Yu, China University of Petroleum, China

**Combined separation of ultrafine dust particle and gaseous pollutants emitted by biomass combustions**, F. Prill\*, S. Schiller, H.-J. Schmid, University of Paderborn, Germany

**Numerical simulation of geometry influence on electrostatic precipitators**, S. Sander\*, U. Fritsching, University of Bremen, T. Londershausen, E. Schmidt, University of Wuppertal, Germany

**Reduction of fine dust-emissions at inner city areas – opportunities and limitations of electrostatic precipitators**, M. Kaul\*, E. Schmidt, University of Wuppertal, Germany

Poster Session II

14:45-16:00 h

G10

**The influence of the layout of fabric filter in flow mass filtrate**, T. W. C. Pereira, F. B. Marques, F. A. R. Pereira, D. C. Ribeiro, S. M. S. Rocha\*, Federal University of Espírito Santo, Brazil

**Evaluation of the performance of fibrous filter used with pulse jet cleaning in industrial chemistry**, S. S. R. Cirqueira\*, F. M. Oliveira, M. L. Aguiar, Fed. University of São Carlos; E. H. Tanabe, Federal University of Santa Maria, Brazil

**Study of the electrostatic effect in cement particles in bag filters**, F. M. Oliveira, S. S.R. Cirqueira\*, M. L. Aguiar, Federal University of São Carlos, Brazil

**Quantification of bioaerosols from filtration of real indoor environment**, P. F. Rosa\*, A. Bernado, M. L. Aguiar, Federal University of São Carlos, Brazil

**Evaluate the efficiency of different filter media in removing nanoparticles**, A. C. C. Bortolassi\*, V. G. Guerra, M. L. Aguiar, Federal University of São Carlos, Brazil

**Cut size control of novel gas cyclone separator with sintered metal cone by clean-air injection**, K. Fukui\*, K. Jikihara, S. Sunada, H. Yoshida, Hiroshima University, Japan

**Characterization and performance of different fibrous filters media for collecting nanoparticle**, A. C. C. Bortolassi\*, V. G. Guerra, M. L. Aguiar, Federal University of São Carlos, Brazil

**Degradation of PPS filter media by NOx at high temperature**, M. Wada\*, H. Wakamatsu, C. Kanaoka, Ishikawa University, Japan

**Performance of cellulose filter media in the filtration of gases at high pressures**, B. A. Lima, G. C. Lopes, M. L. Aguiar\*, Federal University of São Carlos; E. H. Tanabe, Federal University of Santa Maria, Brazil

**Separation of particles out of air by botanical collectors**, G. Reznik, E. Schmidt\*, University of Wuppertal, Germany



Poster Session

14:45-16:00 h

M5

**Degradation of ion exchange membranes used for pickling acid regeneration**, M. Sartor\*, J. Willemsen, T. Reichardt, VDEh-Betriebsforschungsinstitut GmbH; F. Rögner, Cologne University of Applied Sciences, Germany; K. Jacobson, Swerea KIMAB, Sweden

**Performance improvement of countercurrent-flow seawater desalination systems in hollow-fiber direct contact membrane distillation modules**, C.-D. Ho\*, T.-J. Yang, L. Chen, Tamkang University, Taiwan





**Dehumidifying air with ion-exchange membranes,** I. Ladizhensky, E. Korin, E. Korngold, Ben-Gurion University of the Negev, Israel

**Application areas of SARATECH® PBSAC in dialysis techniques,** A. Stephan, J. Raiser\*, Blücher GmbH, Germany

**Multiscale modeling of gas molecules penetration through multilayer graphene membrane,** S. Gusarov\*, K. Bosnick, National Institute for Nanotechnology, Canada

**Poster Session**  
14:45-16:00 h

**F5**

**Efficient simulations of poroelastic deformations in pleated filters,** D. Iliev\*, O. Iliev, R. Kirsch, Fraunhofer ITWM, Germany; A. Mikeli, University Lyon 1, France; G. Printsypar, V. Calo, King Abdullah University, Saudi Arabia

**Designing advanced filtration media through metal additive manufacturing,** N. Burns\*, M. Burns, D. Travis, L. Geekie, Croft Additive Manufacturing; A. E. W. Rennie, University of Lancaster, UK

**Woven wire meshes - Their characteristics and selection criteria,** M. Knefel\*, GKD Gebr. Kufferath AG, Germany

**Pore size characteristics of nonwoven filters under compression loading,** A. Rawal\*, Indian Institute of Technology Delhi, India

**Cake Filtration of Slurries with poor Filterability** 16:00-17:15 h

**L12**

**HiBar steam pressure filtration of coal ultrafines and iron ore concentrates - New developments and results,** R. Bott\*, T. Langeloh, BOKELA GmbH, Germany

**Compressible suspension characterisation and plate-and-frame filter prediction,** A. D. Stickland\*, E. H. Irvin, S. J. Skinner, P. J. Scales, University of Melbourne; A. Hawkey, Bilfinger Water Technologies, Australia; F. Kaswalder, Bilfinger Water Technologies, Italy

**Dewatering of slurry with poor filterability in basket centrifuge: Discharge of supernatant using bypass filter medium,** A. N. Ginting\*, R. Fukuyama, T. Tanaka, M. Iwata, Osaka Prefecture University, Japan; M. S. Jami, Islamic University Malaysia, Malaysia

**Thursday, February 26, 2015**

**Surface Modification of Filter Media**  
09:00-10:15 h

**F1**

**PFOA- and PFOS-free super water- and oil-repellent low pressure plasma nanocoatings for filtration and separation applications,** E. Rogge\*, F. Legein, Europlasma NV, Belgium

**Industrial water and oil repellent nano-coatings for filtration applications,** N. Rimmer\*, P2i Ltd, UK

**Celanese engineered materials for porous filter media,** I. Idiyatullina\*, Celanese, Germany

**Filter Media**  
09:00-10:15 h

**L13**

**Filter media performance and its influence on filtration results – Experience, expectations and possibilities in vacuum and pressure filtration,** A. Seitz\*, D. Bartholdi, I. Erlenmaier, C. Maurer, Sefar AG, Switzerland

**New developments in high performance woven wire filtration media,** M. Theiß\*, F. Meyer, F. Edelmeier, Haver & Boecker OHG, Germany

**Optimal gradient hydraulic media to maximize dust holding capacity,** M. Sillan\*, S. Jaganathan, Hollingsworth & Vose Co., USA

**Air Filters – HEPA**  
09:00-10:15 h

**G11**

**In-situ efficiency measurement for HEPA-filter,** C. Schweinhein\*, Caverion Deutschland GmbH, Germany

**Modern PTFE membrane filters require appropriate testing methods,** R. Bharadwaj\*, H. Daruwala, AAF International, USA

**An investigation on the shorter lifetime of pleated filter compared to flat sheet,** L. Cheng\*, J. Becker, A. Wiegmann, Math2Market GmbH; R. Kirsch, Fraunhofer Institute for Industrial Mathematics, Germany



**Separation of Bio-Products**  
09:00-10:15 h

**M6**

**Membranes or molecular sieves in preparing fuel-grade bio-ethanol,** Q. Kang\*, J. Baeyens, R. Dewil, Catholic University Leuven, Belgium; W. Kong, T. Tan, Beijing University of Chemical Technology, China

**Long term experiment for the separation of "green" hydrogen from biomass gasification by a polymer membrane,** D. Konlechner\*, M. Harasek, H. Hofbauer, Vienna University of Technology, Austria; M. Hackel, AIR LIQUIDE, Germany; E. Sanders, AIR LIQUIDE, USA; K. Bosch, Energie Burgenland AG, Austria

**Production Technology of Filter Media**  
10:45-12:00 h

**F2**

**A neat solution – Modern filters cut with laser technology,** F. Matschke, eurolaser GmbH, Germany

**Why AOI improves the quality of filter base material and coatings and reduces production costs,** H. Oerley\*, Dr. Schenk GmbH, Germany

**Reel to reel UV lithography for Filter and Screen applications,** M. Lehmann\*, micrometal GmbH, Germany

**Sorting and Classification**  
10:45-12:00 h

**L14**

**Electromagnetic separation (EMS) of high-temperature superconductor.** E. Broide\*, Hebrew University, Israel

**Optimization of semi-continuous centrifugal classification processes for colloidal products,** M. Konrath\*, H. Nirschl, Karlsruhe Institute of Technology, Germany

**Physical separation and disposal of secondary waste from the decommissioning of nuclear facilities,** M. Brandauer\*, S. Gentes, S. Stiefel, M. Haist, Karlsruhe Institute of Technology; J. Starflinger, Institute of Nuclear Technology and Energy Systems, Germany

**Air Filters – HVAC**  
10:45-12:00 h

**G12**

**Reducing energy consumption through advances in mechanical Ashrae air filtration media,** C. Desquilles\*, P. Blanckaert, Lydall Performance Materials SAS, France; D. Sullivan, G. Crosby, Lydall Performance Materials, USA

**Saving cost with novel filter media solutions for indoor air quality,** I. Parker\*, Ahlstrom Filtration LLC, USA

**How regulatory changes drive innovation in synthetic filter media for pocket filters,** A. Boni, B. Keil\*, Hollingsworth & Vose, Germany

**Mechanisms, Models, Simulation**  
10:45-12:00 h

**M7**

**Filtration of finest nanoparticles < 15 nm from liquids - A quantitative study,** D. Segets\*, W. Peukert, University Erlangen-Nuremberg, Germany; S.-C. Chen, T. Y. Ling, D. Y. H. Pui, University of Minnesota, USA

**Use of computational fluid dynamics (CFD) for the design of apparatuses for cross flow filtration,** J. Barth\*, S. Ripperger, University of Kaiserslautern, Germany

**Simulation of osmotic and reactive effects in membranes with resolved microstructure,** O. Iliev, K. Leonard, Fraunhofer Institute for Industrial Mathematics, Z. Lakdawala, DHI-WASY GmbH, Germany; E. di Nicolò, Solvay Specialty Polymers, Italy; V. M. Calo, G. Printsypar\*, King Abdullah University, Saudi Arabia

**Fine Fiber and Membrane Manufacturing**  
13:00-14:15 h

**F3**

**High flux solvent resistant nanofiltration membranes from interfacial polymerization,** S.-P. Sun, T.-S. Chung, National University of Singapore, Singapore


**Molecular orientation in highly stretched ePTFE filtermedia,** K. J. Choi, Clean & Science Co., Ltd., USA

**Cost-effective production of track-etched UF membranes,** S. Makkonen-Craig\*, M. Paronen, Arcada University of Applied Sciences, Finland

**Depth Filtration**  
13:00-14:15 h

**L15**

**MNMs: a model for the simulation of depth filtration of non-Newtonian suspensions in granular media,** R. Sethi\*, T. Tosco, C. Bianco, Politecnico di Torino, Italy

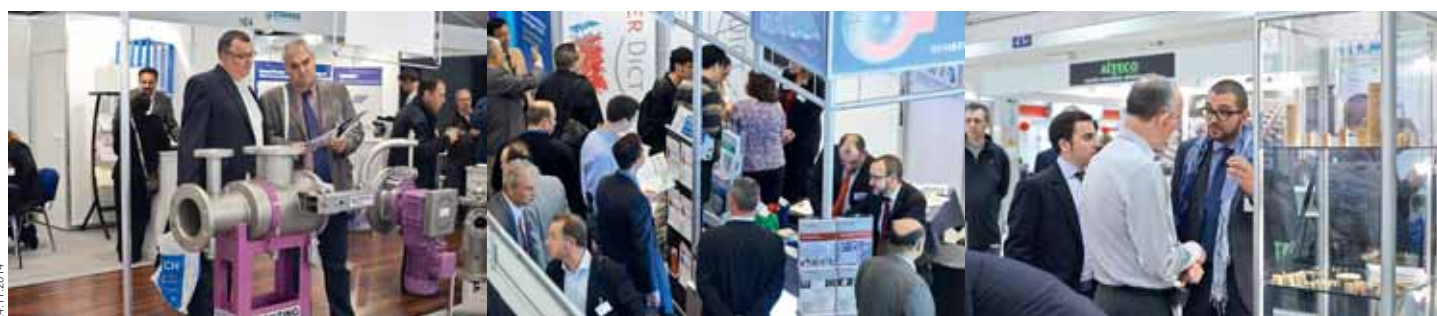

**Experimental study and numerical simulation of the flow-induced deformation of filtering media in automotive transmission filters**, M. Kabel, R. Kirsch\*, S. Staub, Fraunhofer Institute for Industrial Mathematics, Germany, D. Bernards, M. Dederich, IBS FILTRAN GmbH, Germany

**Investigation of depth filtration of aqueous suspensions with particles greater than 1 micron**, L. Petersen\*, S. Ripperger, Technical University of Kaiserslautern, Germany

#### Industrial Gas Cleaning I

13:00-14:15 h

**G13**

**Separating dust out of process air flow using drum filters**, H. Sauter\*, F. Engel, LTG Aktiengesellschaft; U. Schneider, Gebr. Röders AG, Germany

**Design of vacuum cleaned dust filter**, T. Laminger\*, J. Wolfslehner, W. Höflinger, Vienna University of Technology, Austria

**Gas phase advanced oxidation cleans industrial pollution and smell**, C. Meusinger\*, M. S. Johnson, University of Copenhagen; T. Rosenørn, INFUSER A/S, Denmark; F. Hartung, INFUSER Deutschland GmbH, Germany

#### Process and Waste Water Treatment

13:00-14:15 h

**M8**

**Advanced wastewater treatment with ultrafiltration**, L. Causemann; S. Krause\*, University of Applied Science Darmstadt, Germany

**Small scale plants for resource efficiency training in the Indian metal industry**, M. Sartor, P. Ivashechkin, VDEh-Betriebsforschungsinstitut GmbH; F. Rögner\*, Cologne University of Applied Sciences, M. Enders, Simatech GmbH, Germany; M. Balakrishnan, TERI University, India; T. Schneiker, Scanacon AB, Sweden

**A 3,000m<sup>3</sup>/day tubular membrane Ffilter (TMF™) system installed in Korea for wafer backgrinding water reclamation**, D. Frick\*, POREX Filtration, USA; S. Yang, POREX Filtration, China

#### Numeric Simulation of Porous Structures

14:45-16:00 h

**F4**

**Methods of filter media pore space analysis based on geometrical characteristics**, G. Bälz\*, R. Handel, B. Renz, A. Enderich, Mahle Filtersysteme GmbH; C. Feuchter, Aalen University, Germany

**Simulation of cake filtration for polydisperse particles**, J. Becker\*, L. Cheng, A. Wiegmann, Math2Market GmbH, Germany

**Automatic fiber thickness measurement in SEM images validated using synthetic data**, P. Easwaran\*, O. Wirjadi, T. Prill, Fraunhofer Institute for Industrial Mathematics, M. Lehmann, 2MANN+HUMMEL GmbH, S. Didas, University of Applied Science Trier; C. Redenbach, Technical University of Kaiserslautern, Germany

#### Coalescer/Liquid-Liquid Separation

14:45-16:00 h

**L16**

**Oily and wastewater separation by electroflotation**, I. L. Nascimento, E. Mattedi, M. F. Cometi, W. V. Paiva, S. M. S. Rocha\*, Federal University of Espirito Santo; E. R. Nucci, Federal University of São João Del Rei, Brazil

**Preliminary studies of new water removal element in purification applications of diesel fuels and lube oils**, R. Chen\*, Kaydon Filtration Corp., USA

**Challenges of testing fuel water separation efficiency**, G. Venkateswaran, A. Goodby\*, Ahlstrom Transportation Filtration, USA

#### Industrial Gas Cleaning II

14:45-16:00 h

**G14**

**Bag Filters: DURAtes microfiber felt for high-efficiency filtration**, D. De Angelis\*, E. Galletta, L. Cattaneo, L. Balzaretti, Testori S.p.A., Italy

**Pressure resistance parameters and dedusting performance of differently sized needle felt bags in a pilot scale test facility**, F. Seffrin\*, D. Hess, Balcke-Dürr GmbH, Germany

**Intelligent filter solutions with focus on low weight/foot print and premanufactured design**, L. Gamborg\*, M. Staben, L. Korkholm, K. Poulsen, B. O. Andersen, FLSmidth A/S, Denmark

#### Ceramic Membrane Applications

14:45-16:00 h

**M9**

**Ceramic hollow fiber membranes as new filter media and their application in oil/water separation processes**, S. Schütz\*, F. Ehlen, I. Unger, MANN+HUMMEL GmbH; M. Ebrahimi, S. Kerker, P. Czermak, University of Applied Sciences Mittelhessen, Germany

**Investigation the performance of cross-flow micro-filtration of titanium dioxide suspension**, T. H. T. Trinh, W. Samhaber, University Linz, Austria

**Hybrid flotation-filtration process for oil water separation based on ceramic membranes**, M. Beery\*, J. Ludwig, L. León, akvolution GmbH, Germany

Please note that the Programme is subject to amendments.

24.11.2014

## The Conference Registration includes

Congress Proceedings featuring all papers in an abstract book and full paper versions on USB stick

Refreshments during breaks

Lunch/es

Welcome Reception on 24 February, 2015

Entrance to the FILTECH 2015 Exhibition from 24-26.02.2015

FILTECH 2015 Exhibition Catalogue

Cologne Public Transport Ticket

Fees already include German VAT.

Register online: <https://filtech.de/registration2015/>



## CFD SIMULATION OF NANOFIBER-ENHANCED AIR FILTER MEDIA

Paolo Tronville\*, Politecnico di Torino, Corso degli Abruzzi 24, 10129 Torino - Italy;  
 L.L.X. Augusto, A.C.C. Bortolassi, G.C Lopes, J.A.S Gonçalves,  
 Universidade Federal de São Carlos, São Carlos, Brazil;  
 R.D. Rivers, EQS Inc., Louisville, Kentucky 40204 USA

### ABSTRACT

The first step in a CFD analysis of filter media flow is to create a computational domain geometry which imitates the simulated media as closely as is practical. The media in the present study combined a relatively flat web of nanofibers with a cellulosic fiber support media. Fig. 1, a SEM image of the material at 1000x, shows the highly random nature of the two media elements, and the difference in scale between them. Fig. 2 is a 20000x SEM image of the same media, showing the polymeric nanofiber web, and behind it, a single cellulosic fiber having a diameter perhaps 100 times the diameter of the nanofiber web elements. A CFD grid suited to calculating the flow patterns through the cellulosic media structure would be far too coarse to simulate flow around the nanofiber web elements. This scale difference forces some assumption about the interaction between the media layers.



Fig. 1 Nanofiber/cellulosic media, 1000x.

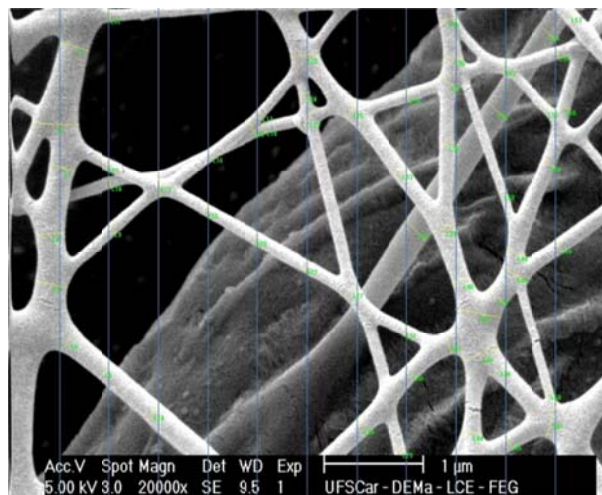


Fig. 2. 20000x image, showing nanofiber details.

Our models are limited to two dimensions, representing cross-sections cut through the media in the direction perpendicular to figures 1 and 2. Our initial studies modeled the nanofiber web alone, on the assumption that the flow around the nanofibers is not greatly influenced by the presence of the downstream cellulosic fibers. It is apparent from Fig. 2 that not all parts of the nanofiber web have circular cross-sections. Our image-analysis technique samples the distribution of fiber diameters by scribing parallel lines across the image (faintly visible here). The diameter of the web element at each line/fiber crossing is tabulated. An estimate is made of the maximum width on the image for which the web element cross-section can be considered circular. We make the assumption that the relatively flat web elements linking round sections have oval cross-sections, all of the same thickness. We found that the distribution of web element widths is “doubly-truncated log-normal”, meaning that both lower and upper limits to the widths exist. This geometry was used with a CFD code to calculate particle capture, and compared to results of tests on the actual media.

### KEYWORDS

CFD, Nanofiber, Cellulose Fibers, Fiber Size Distribution, Flow simulation

## CFD SIMULATION OF NANOFIBER-ENHANCED AIR FILTER MEDIA

Paolo Tronville\*, Politecnico di Torino, Corso degli Abruzzi 24, 10129 Torino - Italy;  
 L.L.X. Augusto, A.C.C. Bortolassi, G.C Lopes, J.A.S Gonçalves,  
 Universidade Federal de São Carlos, São Carlos, Brazil;  
 R.D. Rivers, EQS Inc. Louisville, Kentucky 40204 USA

It has been known for many years that fine fibers contribute greatly to the particle-capture efficiency of fibrous air filters (Graham et al., 2002; Podgórski et al., 2006). HEPA and ULPA filter media, for example, contain glass fibers having diameters less than 1  $\mu\text{m}$ . Nanofibers – defined as fibers or fiber-like structures with dimensions less than 100 nm, or 0.1  $\mu\text{m}$  (Rai et al., 2009; Warheit et al., 2008) – have only in recent years been added to air filter media. Simulation of the behavior of media containing nanofibers poses problems and uncertainties that have generally been overcome for media with coarser fibers. Since the addition of nanofibers has been shown to improve particle-capture efficiency adding to media a little pressure drop, it is important to develop simulation techniques which accurately predict the effects of nanofibers.

### Air Filter Media Studied

The fibrous filter media described in this study has a rather unique structure. A scanning-electron microscope (SEM) image of the cross-section of this media is shown in Fig. 1.

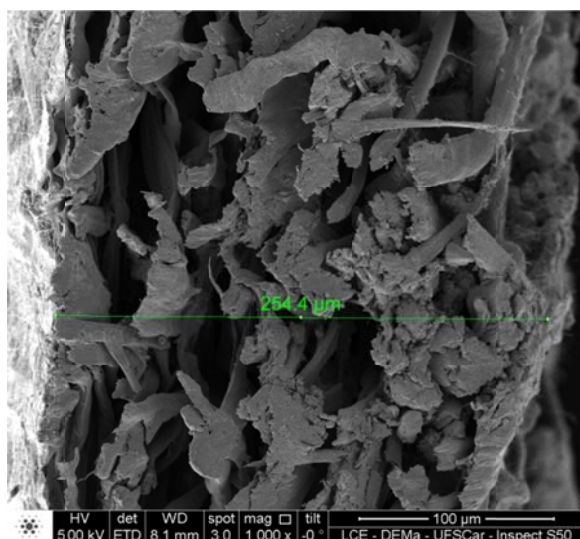


Fig. 1 - NC13 media, cross-section at 1000x. White region at left is nanofiber web, seen at a slight angle.



Fig. 2 - NC13 media, showing nanofiber web applied to upstream face of cellulosic support media (1000x)

The highly irregular grey shapes filling most of the image are cross-sections of the cellulosic support media. Fig. 2 shows the nanofiber web, which covers most of the upstream face of the support media. Fig. 3 is a higher-magnification image (20000x) of a portion of the web. Most of the length of the nanofiber web elements consists of straight sections with apparently round cross-sections. These round sections are joined by relatively flat links, which have rounded edges. The aim of this study was to model these two very different layer structures – nanofiber layer and cellulosic support media – and see how closely CFD simulations of flow through the two could model both the pressure drop across the layers and the particle-capture efficiency of each. This study is incomplete, but we have developed some tools which will assist its completion.

## SEM Image Analysis

The first step in any CFD study is to develop a model of the geometry to be simulated. Analysis of SEM images can yield quite accurate simulations of complex geometries. We began with analysis of images like Fig 3. Data from several images were merged, because the area of media shown in each image is an extremely small sample of even a square centimeter of the actual media (Fig. 3 represents about  $0.0003 \text{ cm}^2$  of the media). Parallel lines were drawn digitally across the images, and intersections between these lines and the web elements identified. The width of the element images was measured, in a direction normal to the element edge at the intersection.

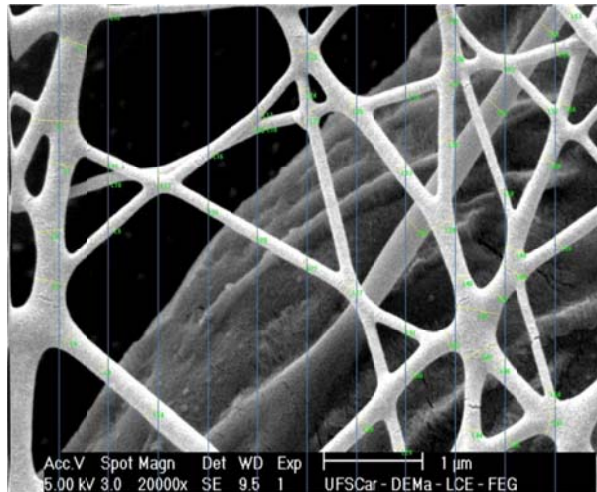


Fig. 3 - NC13 media, detail of nanofiber web

For the straight, round elements this width corresponds to the diameter of the “nanofiber”. The parallel-line scheme effectively integrates the length of “fiber” corresponding to each diameter measured.

The treatment of the links joining round sections is somewhat arbitrary. In fact, the links probably vary in thickness, but this thickness cannot be determined from the image. We therefore made the analysis based on the assumption that all links have the same thickness, and that the link thickness is equal to the largest diameter of a round section observed. For the set of images analyzed, this diameter/thickness was estimated at 341 nm. On this basis, a section cut through the web would look somewhat like Fig. 4.

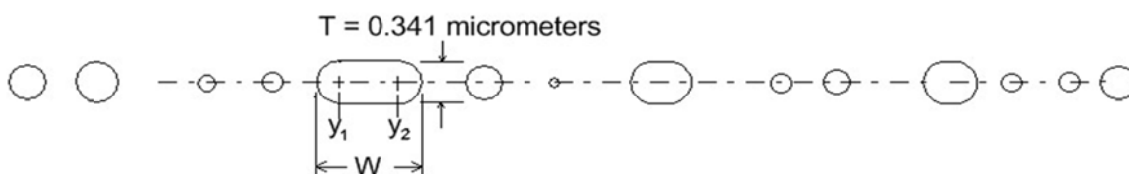


Fig. 4 - Example of nanofiber web cross-section, showing random location of elements, with random diameter circular cross sections, and oval links, all of the same thickness  $T$ .

## Curve-Fitting the Distributions

The statistics of the width distributions are dependent on the number of line/web intersections, and may be very ragged in the tails of the distributions. It may also be necessary to generate more elements in a CFD domain than were actually identified in the images. For these reasons, we fitted the data to a “truncated-log-normal” distribution. To help



this fitting process, it is useful to plot the measured distribution data on “log-probability” graph paper. The computer program we developed does this. A sample of the display for the nanofiber web data is shown in Fig. 5.

Using the log and probability scales, as in Fig. 5, a truly log-normal distribution plots as a straight line. The distribution shown in Fig. 5 is obviously not truly log-normal. The program allows the user to specify the minimum and maximum sizes that can be expected for the data plotted. The user then selects the end-points of a central portion of the distribution, and chooses whether to fit this portion with a straight line ( $Y = A + BX$ ) or a second-degree polynomial ( $Y = A + BX + CX^2$ ).

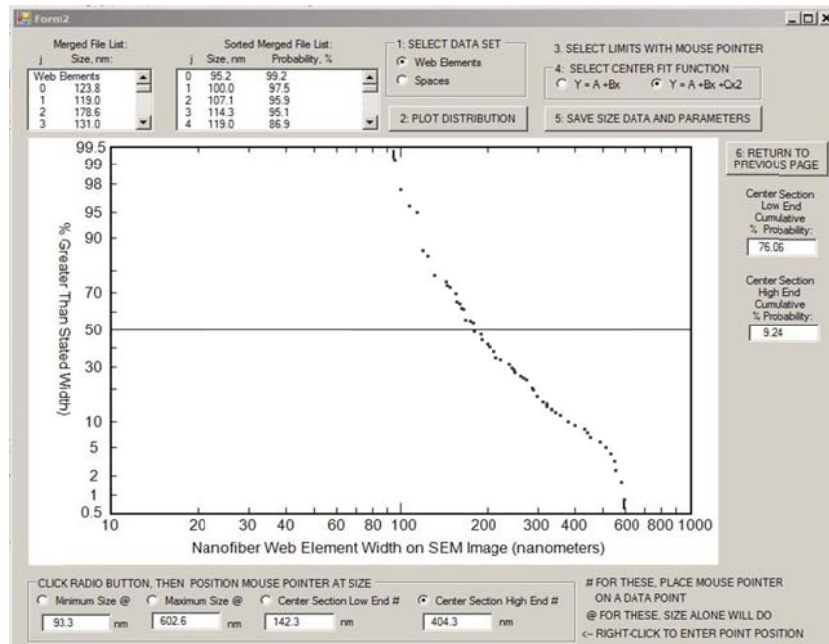


Fig. 5 - Computer display of truncated log-normal distribution (nanofiber web data)

In the case shown, the  $Y = A + BX + CX^2$  fit for the center section of the distribution seems warranted. The program then calculates fits to the data in both tails, using a function which is asymptotic to the chosen minimum and maximum values. The fitted function is:

$$Z = G \cdot e^{-K \cdot u} \quad \text{or} \quad \ln(z) = \ln(G) - K \cdot u$$

where  $z$ ,  $G$ , and  $u$  are as shown in Fig. 6 for the region between about 90 and 140 nm. The same function is used to fit the points for the upper asymptote, here between 440 and 620 nm.

With the parameters of the curve-fits in hand, the user can generate any required number of shapes matching the distribution, as shown in Fig. 4.

A domain geometry like Fig. 4 requires that the shapes be spaced apart randomly as the fibers and links are in Fig. 3. To accomplish this, we tabulated the lengths of the line segments crossing the spaces between each web element in images like Fig. 3. The distribution of these line segment lengths is also truncated log-normal, and its parameters can be established using the same program as was used to analyze the web elements.

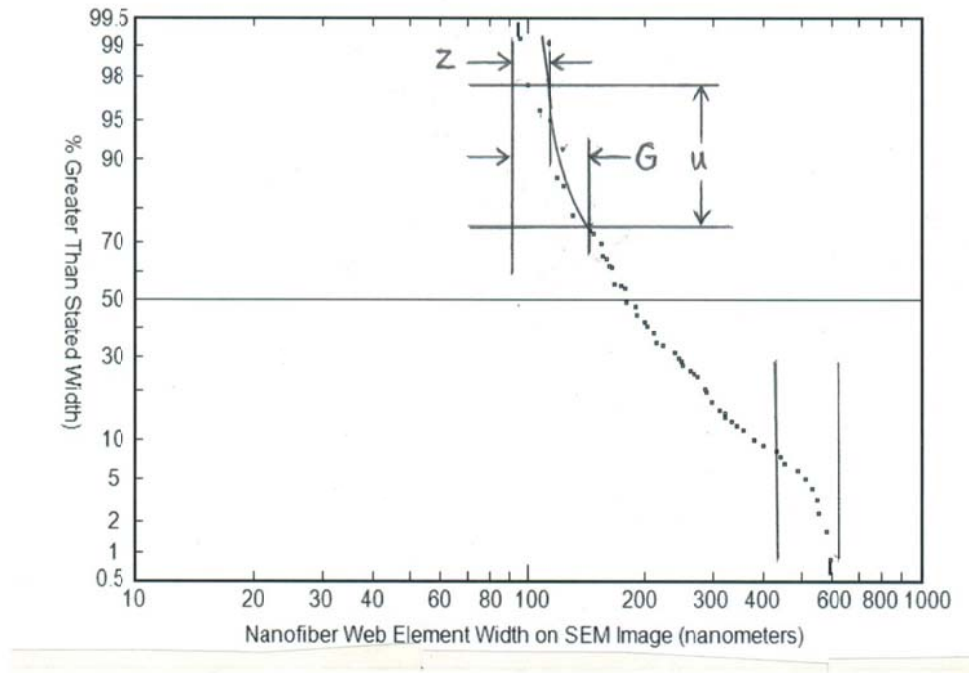


Fig.6 - Curve-fitting to truncated-log-normal distribution: tail asymptotes

### Knudsen Length and Slip Boundary Conditions

As the program calculates the sizes and positions of the web elements for the CFD domain, it also determines whether each element is of such size that slip conditions should be applied to its boundaries. The criterion for slip is the Knudsen number of the shape,  $Kn = \lambda/L$ , where  $L$  is a “significant dimension” of the body and  $\lambda$  the mean free path of the molecules in the gas simulated. For a circular cylinder (hence circular fibers),  $L = R$ , the radius of the cylinder. For non-circular bodies, we define  $L$  as:

$$L = 2 \cdot \frac{\text{area of body cross-section}}{\text{perimeter of body cross-section}}$$

The area and perimeter of each oval in our case is easy to calculate from the values of  $W$  and  $T$  in Fig. 4. In all cases,  $L$  thus calculated for all web elements is such that for  $\lambda$  the test air in our laboratories, slip conditions must be applied to simulations of the web. Tronville et al. (2012) described with more details the interaction of gas molecules with fiber surfaces.

### Simulation of Cellulosic Media Fibers

Although much of the nanofiber web lies between contacts with the cellulosic support fibers, we cannot assume that the flow through the nanofiber web is entirely independent of the presence of the cellulosic support fibers. Simulating the nanofiber web layer and the complete thickness of the cellulosic media is not practical, because of the large difference in scale of the elements in each layer. We could, however, add simulations of parts of a few cellulosic fibers to the CFD domain, immediately downstream of the nanofiber web, and thus in part model the effect of the support fibers on the nanofiber web flow.

Even for this limited inclusion of the cellulosic support media fibers in the CFD domain, we cannot simply introduce an arbitrary set of shapes of arbitrary size. The solids fraction in the space immediately downstream of the nanofiber web must approximate the solids fraction in the actual media, and also have sizes matching the actual media.

Analysis of SEM images like Fig. 1 provides the necessary information.

The solids fraction of the media is approximated by  $\frac{\text{sum of the fiber section areas}}{\text{area of the image rectangle}}$ .



Fig.7 - Outlines of the fiber cross-sections in Fig. 1

Image-analysis software exists that can determine areas of irregular shapes such as those in Fig. 1, or one can weigh a paper print of the image rectangle, then cut the shapes from the print, then weigh the collection of shapes to obtain the relative areas. The “size” of the individual shapes is difficult to define. We define size in this case as the longest distance between two points on the shape perimeter. The numbers on Fig. 7 are the values of these distances (in millimeters) on a paper print of Fig. 1. Not surprisingly, these distances proved to have a truncated log-normal distribution, which could be fitted as described above. The calculated parameters allowed us to generate some shapes to represent the cellulosic fibers immediately downstream of the nanofiber web. The parameters can also be used to create a domain which simulates the geometry of the full depth of the cellulosic media.

### Generation of Cellulosic Fiber Shapes and Their Location in the CFD Domain

Fig.1 shows how irregular the cellulosic fiber cross-sections are. We decided that these shapes could be simulated by many-sided polygons, built around some basic general forms: triangles, pentagons, and U-shapes. A program was developed to produce irregular boundaries on the sides of these basic shapes, which were also randomized in both overall size and proportions. Examples of the forms produced are shown in Fig. 8. These shapes are generated within a group of basic shapes – rectangles, triangles, U-shapes – for which the basic sides are replaced with jagged lines made of short line segments. Both the size and the angular orientation of the finished polygons are set to random values by random-number generators. The vertices of the polygons are saved in a file for later positioning in a computational domain.

The 2D shapes in the CFD domain cannot be allowed to overlap, since that would represent two fibers occupying the same space. The test for overlap between circles is simple, but the test for overlapping irregular polygons is not. A naïve approach for overlap tests each line segment in the perimeter of the first shape for intersection with each line segment in the perimeter of the second shape. For the shapes we generate, 30 or more line segments in a shape perimeter are not unusual; at test for overlap of two such shapes could require 900 tests for each potential overlap.



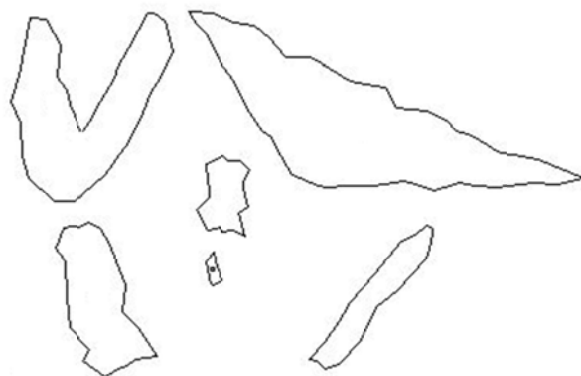


Fig.8 - Examples of irregular polygons simulating the cross-sections of cellulosic fibers

The number of tests is reduced substantially by determining the lowest and highest X- and Y-coordinates of the polygon vertices of each shape. These define a rectangle which circumscribe the shape. If the circumscribing rectangles of two shapes do not overlap, the polygons cannot overlap; if the circumscribing rectangles do overlap, the polygons may overlap, but a much reduced number of polygon sides need to be tested for intersections.

The area of each polygon is needed, for the sum of their areas in the domain must be at least approximately equivalent to the solids fraction of the cellulosic media. The calculation of the exact area of these irregular polygons is very complicated. We chose to allow an approximation of the area to suffice. The procedure for generating the irregular perimeters of the polygons allows a relatively simple calculation of the possible lower and upper limits for the areas of the polygons. The average of these two values is close enough to the exact area of each irregular polygon to use in calculating the fractional solids of the simulated geometry.

### CFD Simulations: Nanofiber web Input Geometry and Computational Grid

The CFD domain width (the Y-direction for the geometry) was set at 200  $\mu\text{m}$  to allow a reasonable sample of the nanofiber web elements to be included. An empty zone 1  $\mu\text{m}$  deep (the X-direction) was provided upstream of the nanofiber web, with a uniform entrance velocity set across the domain width. For the initial runs, the X-velocity component  $V_{x,0}$  was set at 10.4 cm/s, and the Y-velocity component set at 0. A zone 1  $\mu\text{m}$  deep was also provided downstream of the nanofiber web, with the pressure derivative  $\partial P/\partial x$  set equal to 0 along the downstream boundary of this empty zone. A grid was created in the domain with cells made progressively smaller as the nanofiber web element boundaries were approached, to allow resolution of the flow in the nanofiber web space. Longest and Vinchurkar (2007) stated that the grid should be refined in regions of interest to increase the resolution and reduce discretization errors. In the case of this study, the grid was refined near the fibers, which is the region of interest and where the gradients of pressure and velocity are larger. A portion of the grid, 11  $\mu\text{m}$  wide by 2.34  $\mu\text{m}$  deep, is shown in Fig. 9. The complete domain is about 18 times as wide as shown here.

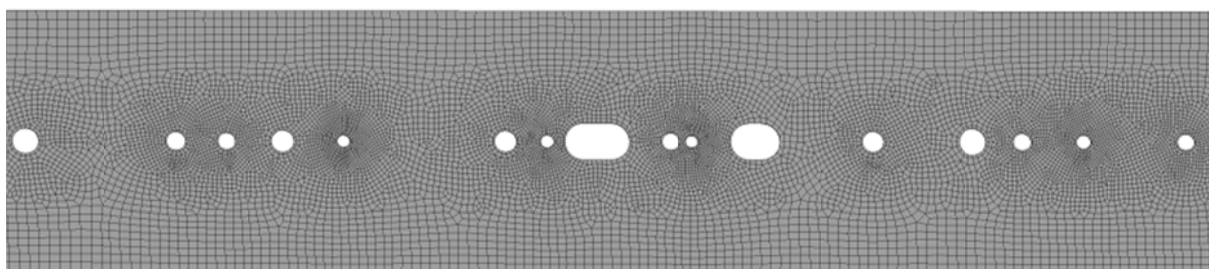


Fig. 9 - Portion of computational grid, showing refinement near web elements

## Results of CFD Simulations: Pressure Drop

Runs of the ANSYS Fluent code were made using the geometry described, one with zero-slip at the web element boundaries, and one with full-slip at the boundaries. Fig. 10 shows the pressure patterns which were obtained, using an inlet velocity of 10.4 cm/s. The airflow direction is upward in Fig. 10A and 10B. The surprising thing about these two patterns is how little they differ in appearance. However, there is in fact substantial variation between the average pressure drops across the nanofiber web, depending on the slip level assigned to the nanofiber web boundaries.

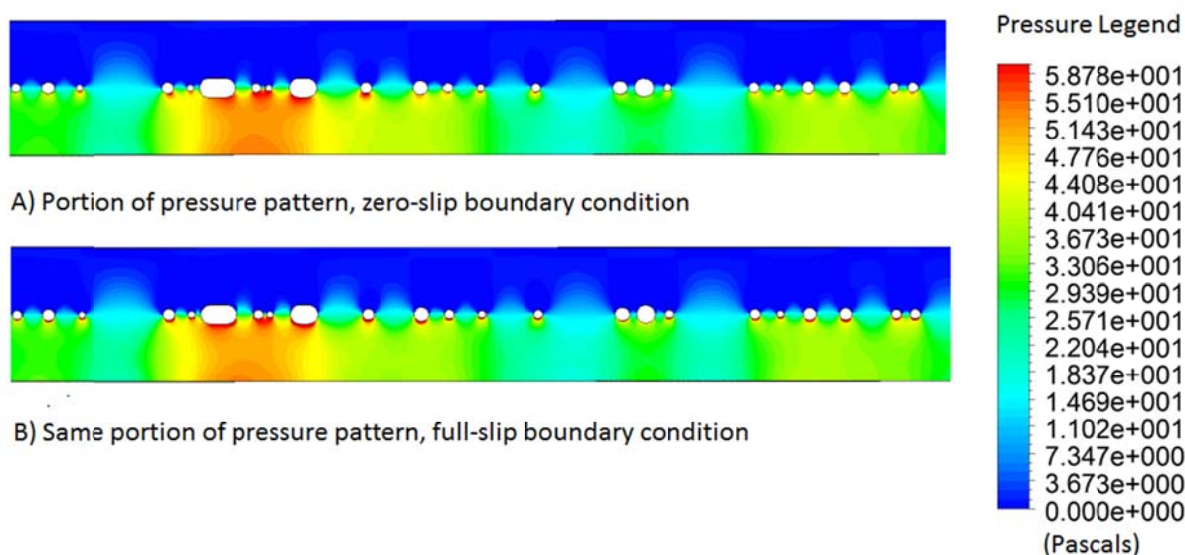


Fig. 10 - Portions of CFD-computed pressure patterns

The pressure drop across the domain in Fig. 10 obviously varies for different values of the Y-coordinate, but one cannot accurately determine from images like Fig. 10 the drop at any Y value. The Fluent code has built-in procedures which simplify the calculation of the average value of pressure drop between two lines with constant X coordinates. For the no-slip case, Fig. 11 shows the pressures along the line 1  $\mu\text{m}$  upstream of the nanofiber web, and Fig. 12 the pressures along the line 1  $\mu\text{m}$  downstream of the nanofiber web. Fluent calculates the average values of pressure along each line. The difference between these two averages is the average pressure drop between the lines, in our case, the pressure drop across the nanofiber web. For the zero-slip case at 10.4 cm/s this was 27 Pa. Fig 13 and Fig.14 show the same pressure variations for the full-slip case; here, the difference was 17 Pa.

Samples of the support media without its nanofiber web layer were not available from the manufacturer, and it is all but impossible to remove the nanofiber web from the cellulosic support. The only pressure-drop measurements that could be made were, therefore, for the composite, two - layer media. The pressure drop across the two layers is essentially additive, so that when we obtain simulations of the full depth of the cellulosic media, the sum of the simulated pressure drops across the two layers can be compared with the measured pressure drop across the actual composite media. An accurate simulation predicts both pressure drop and particle capture efficiency accurately, but particle-capture efficiency is a more sensitive verification of the CFD simulation than pressure drop.

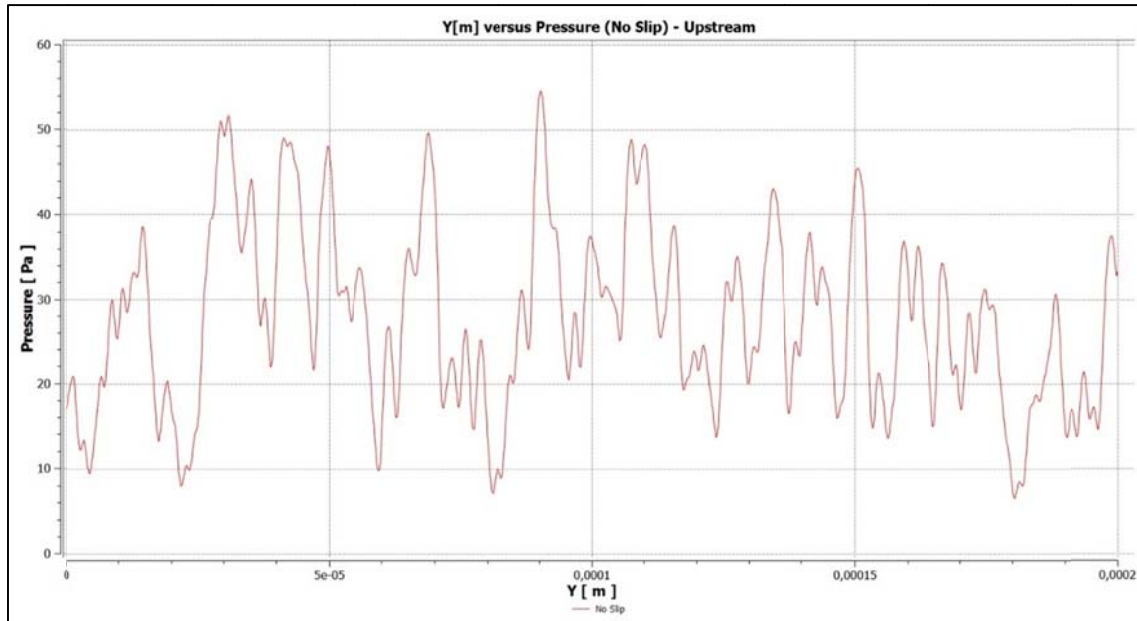


Fig. 11 - Fluent output of pressure along the line 1  $\mu\text{m}$  upstream of the nanofiber web (No-slip case at 10.4 cm/s media face velocity)

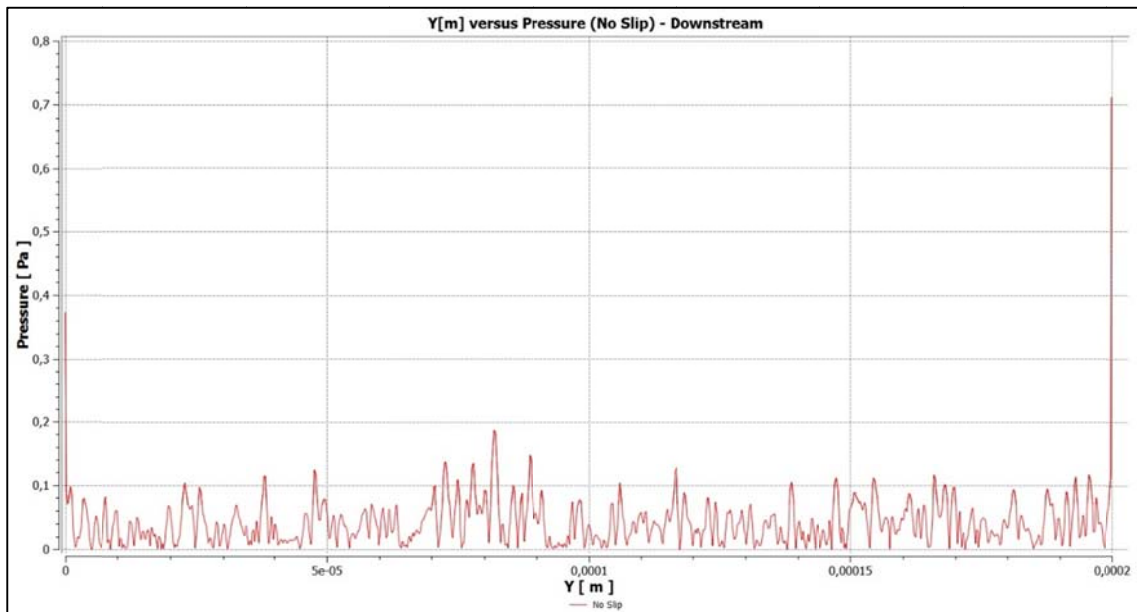


Fig.12 - Fluent output of pressure along the line 1  $\mu\text{m}$  downstream of the nanofiber web (No-slip case at 10.4 cm/s media face velocity)

There is reason to believe that particle capture takes place almost entirely on the nanofiber web, and that the cellulosic media is little more than a means of supporting the nanofiber web. When it is not possible to separate the layers, CFD simulation can quantify the relative contributions of the two layers to particle capture and pressure drop.



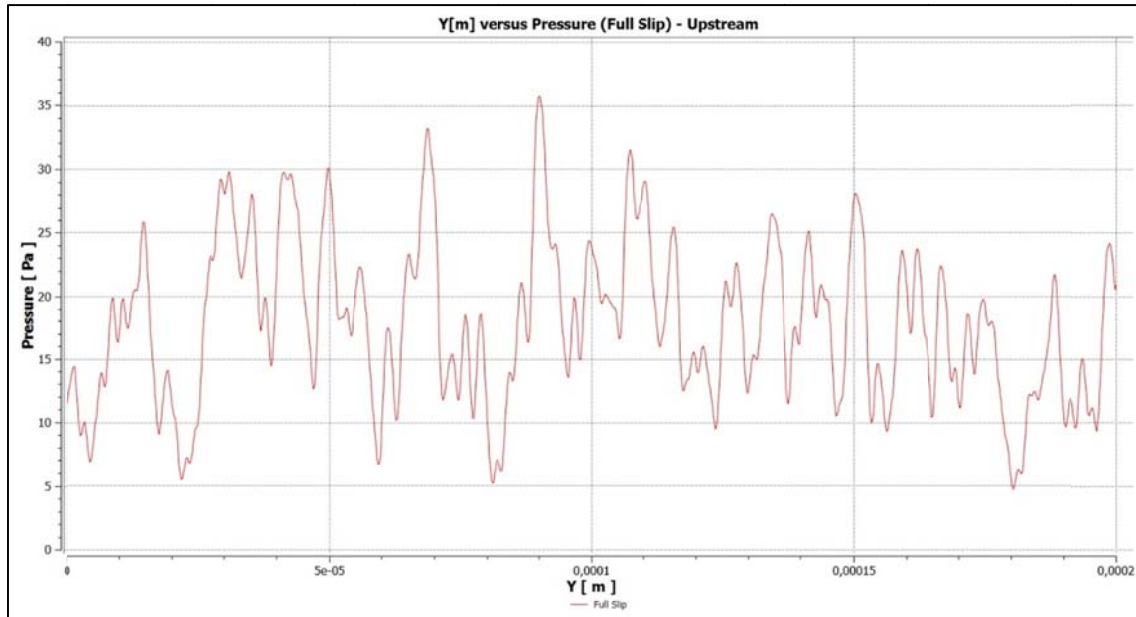


Fig.13 - Fluent output of pressure along the line 1  $\mu\text{m}$  upstream of the nanofiber web (Full-slip case at 10.4 cm/s media face velocity)

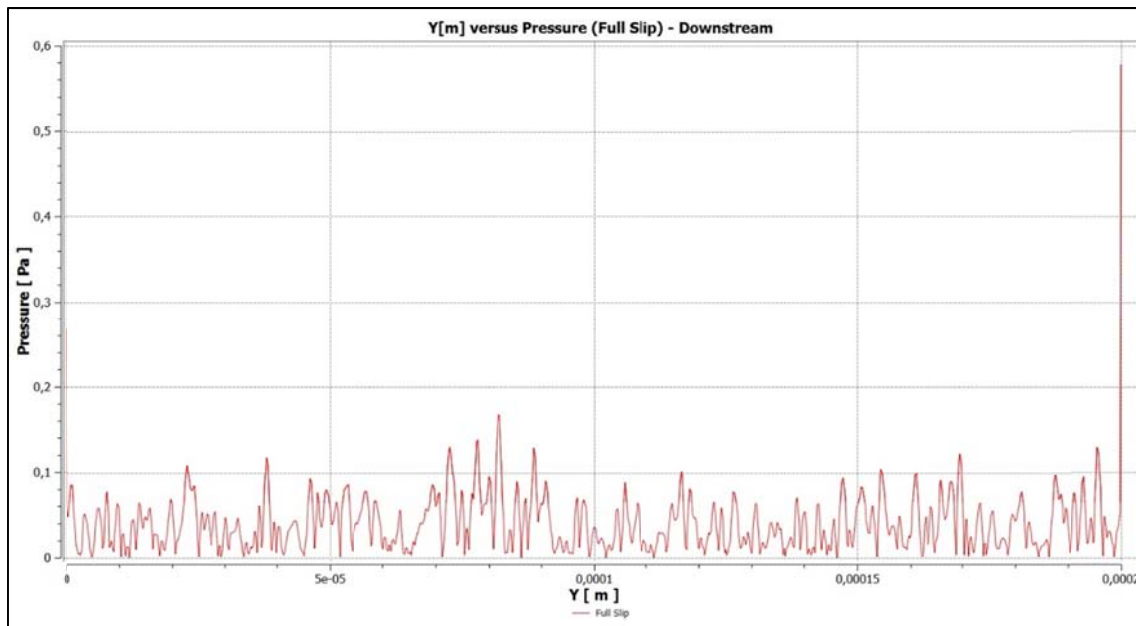


Fig.14 - Fluent output of pressure along the line 1  $\mu\text{m}$  downstream of the nanofiber web (Full-slip case at 10.4 cm/s media face velocity)

We have not yet completed simulations of the cellulosic support media flow, hence cannot compare the measured data for the composite media to simulated values. Table 1 gives the CFD-simulated pressure drops across the nanofiber web alone, for both full-slip and no-slip conditions, and the pressure drop across the composite media. The Knudsen Numbers for all elements of the nanofiber web was high enough that the full-slip column should be correct. The contribution of the nanofiber web layer to overall pressure drop thus appears to be quite small. Wang et al. (2008) investigated filters containing a layer of nanofibers and found values of pressure drop with the same order of magnitude than those found in this work.

Table 1 - Simulated and measured media pressure drops

Media face velocity [cm/s]	Nanofiber web simulated pressure drop [Pa]		Composite media experimental pressure drop [Pa]
	Full Slip	No Slip	
5.2	8.9	13.8	108
6.5	11.1	17.2	131
7.8	13.3	20.6	155
10.4	17.8	27.5	204
13.0	22.2	34.4	258
15.6	26.7	41.3	306
17.3	20.6	45.8	340

### Results of CFD Simulations: Velocity Patterns

The CFD code provides displays of the velocity patterns calculated for the domain geometry. Fig. 15 shows the results for the same portion of the domain that is shown in Fig. 10. These patterns show that in the zero-slip condition, velocity is indeed zero around the entire boundary of each simulated web element. The velocity at the exact boundaries cannot be seen at the scale, so that the behavior for full-slip cannot be seen, but it is clearly different from the zero-slip case. The higher velocities through relatively wide openings in the nanofiber web are also apparent, along with the influence of these higher velocities on the flow around nearby web elements.

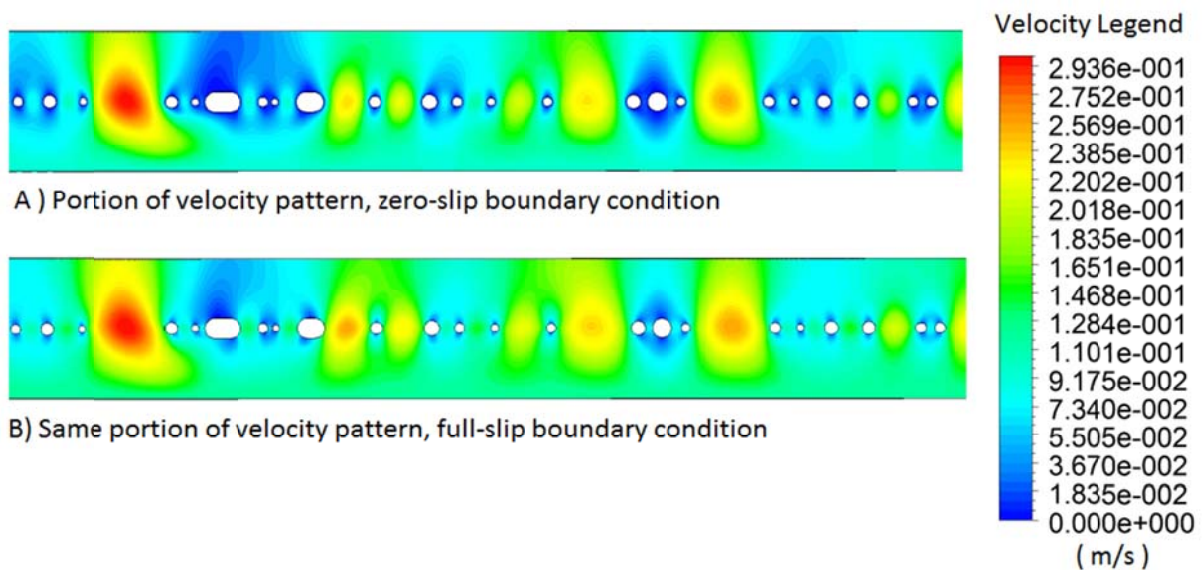


Fig.15 - Portions of computed velocity patterns

### Results of CFD Simulations: Particle Capture

A sample of the NC13 media was tested at Politecnico di Torino using a polydisperse DEHS aerosol and a PMS LAS-X II laser light-scattering aerosol particle spectrometer. The media velocity was 10.4 m/s. Table 2 gives the results of that test. We have not yet obtained CFD simulations of particle capture using the domain geometry of Fig. 9, which gave the pressure and velocity patterns of Fig. 10 and Fig. 15.

Table 2 - Penetration Values NC13 Media at 10.4 cm/s, DEHS Aerosol

Diam. [nm]*	110	134	173	224	296	397	520	671	866	1225	1732	2449
Pen. [%]	67.4	72.2	66.5	61.0	53.0	41.0	27.3	18.6	11.7	3.8	1.2	0.6

\*Mid-channel diameter, nanometers, PMS LAS-X II aerosol spectrometer

### Anticipated Further Research

We will first add simulations of particle capture of the nanofiber web at several media face velocities, comparing the simulations to test values. We will measure the solids fraction of the cellulosic support media, then generate the domain of the cellulosic media using polygon simulations of its fiber cross-sections. CFD runs under zero-slip conditions for the cellulosic media will allow us to compare its pressure drop and particle capture combined with the nanofiber web to measured values of the composite media. These simulations will be run for a range of velocities, to test the reliability of the models and CFD calculations at different operating conditions.

### Conclusions

While this study is incomplete, it points to ways to simulate nanofiber additions to filter media, when the nanofibers exist as a single-layer web of interconnected cylindrical elements. We have also developed means to generate fiber cross-sections and size distributions which closely mimic the appearance of SEM images of the cross-sections of actual cellulosic media. CFD runs calculating the pressure drop across the simulated nanofiber web geometry show that the pressure drop across the nanofiber web is a small percentage of the composite media pressure drop.

### Acknowledgements

The authors wish to express their appreciation of the help of Christian Candido in converting the domain geometry files generated in this study into formats acceptable to the Fluent CFD code and of Gabriel Justi in creating the mesh of the computational domain. The authors are also grateful to FAPESP, CAPES and CNPq for the financial grants that made this work possible.

### References

- Chen D-R., Pui D. Y. H., Hummes D., Fissan H., Quant F. R., Sem G. J. Design and Evaluation of a Nanometer Aerosol Differential Mobility Analyzer (Nano-DMA). *Journal of Aerosol Science*, v. 29, n. 5, p. 497-509, 1998.
- Graham K., Ouyang M., Raether T., Grafe T., Mc Donald B., Knauf P. Polymeric Nanofibers in Air Filtration Applications. Fifteenth Annual Technical Conference & Expo of the American Filtration & Separation Society, Galveston, Texas, April, 2002.
- Longest P. W., Vinchurkar S. Effects of Mesh Style and Grid Convergence on Particle Deposition in Bifurcating Airway Models with Comparisons to Experimental Data. *Medical Engineering & Physics*, v. 29, p. 350-366, 2007.



Podgórski A., Balazy A., Gradón L. Application of Nanofibers to Improve the Filtration Efficiency of the Most Penetrating Aerosol Particles in Fibrous Filters. Chemical Engineering Science, v. 61, n. 20, p. 6804-6815, 2006.

Rai M., Yadav A., Gade A. Silver Nanoparticles as a New Generation of Antimicrobials. Biotechnology Advances, v. 27, p. 76-83, 2009.

Tronville P., Zhou B., Rivers R. Realistic Air Filter Media Performance Simulation. Part I: Navier-Stokes/Finite-Volume Computational Fluid Dynamics Procedures. HVAC&R Research, v. 19, p. 493-502, 2013.

Wang J., Kim S. C., Pui D. Y. H. Investigation of the Figure of Merit for the Filters with a Single Nanofiber Layer on a Substrate. Journal of Aerosol Science, v. 39, p. 323-334, 2008.

Warheit D. B., Sayes C. M., Reed K. L., Swain K. A. Health Effects Related to Nanoparticle Exposures: Environmental, Health and Safety Considerations for Assessing Hazards and Risks, Pharmacology & Therapeutics, v. 120, n. 1, p. 35-42, 2008.